


Check out
New Products

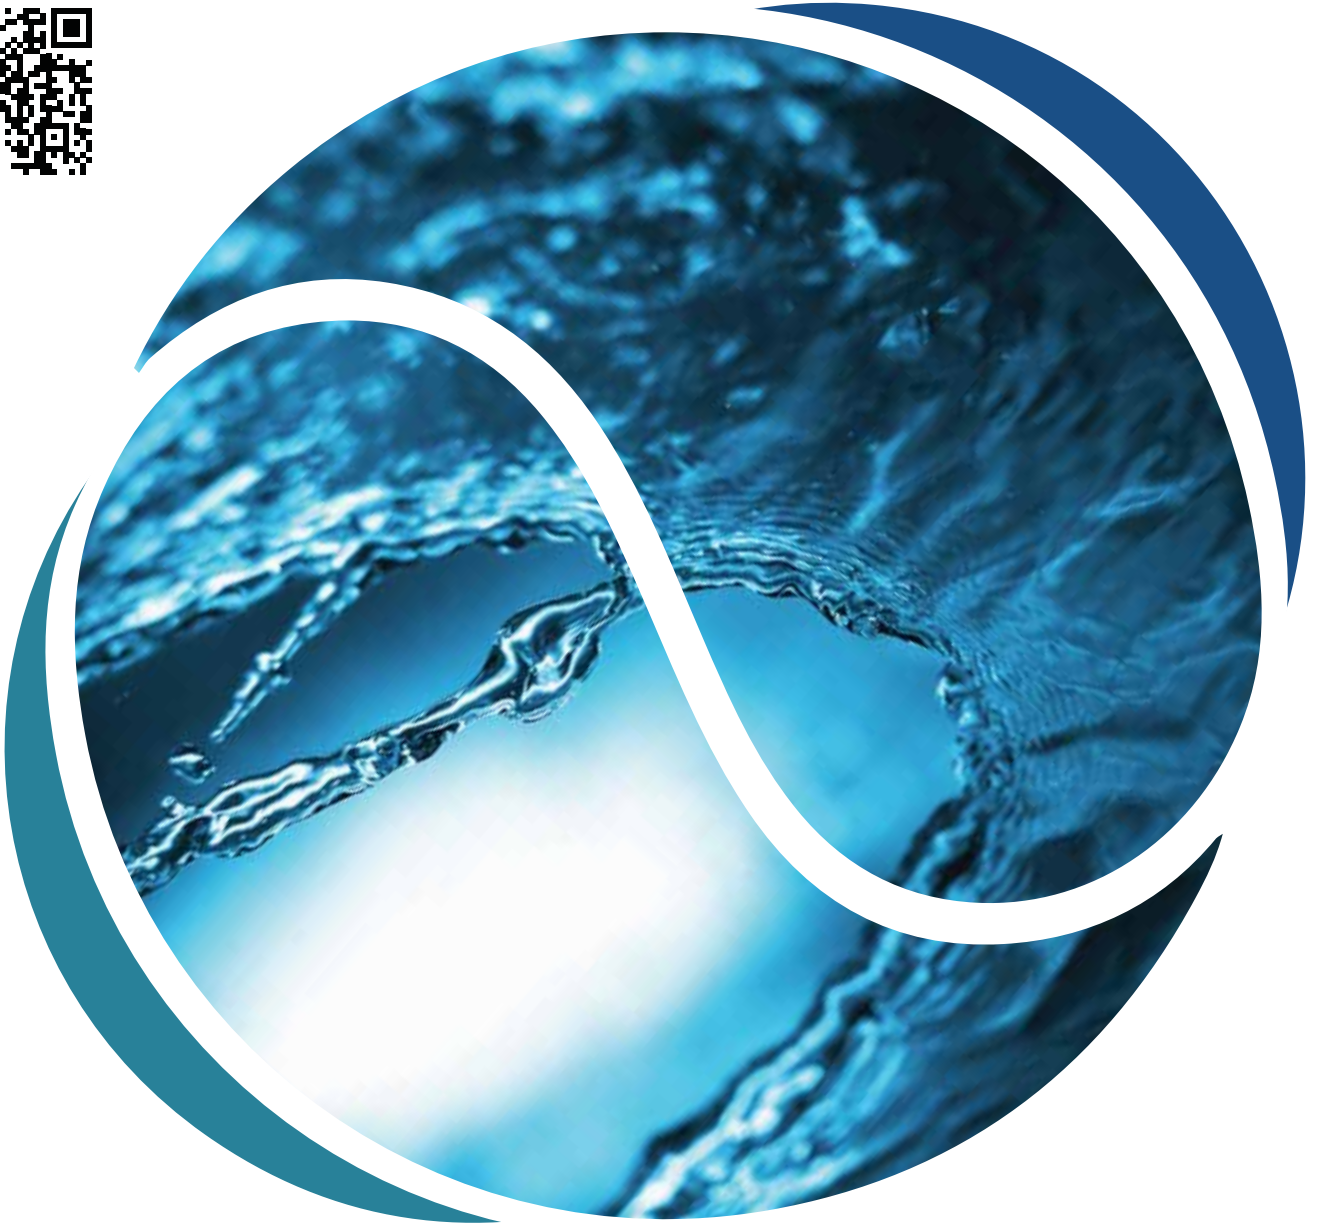

UPVC VALVES & FITTINGS

Our Brand-New Products 2024

fitvalf.com.tr



UPVC FITTINGS & VALVES

Our Brand-New Products 2024

Patented Product

Single Union

21

- ◆ Adjustable ball pressure
- ◆ Patented union screwing with handle
- ◆ Teflon seats.
- ◆ EPDM o-rings. PN16



- ◆ Slip or Threaded Connection
- ◆ 25 - 32 - 40 mm and New 50 - 63

Three Way Valve

- ◆ Wide demper opening distance
- ◆ Demper closure with spring
- ◆ Easy top access for maintenance



Ball Valve

18

- ◆ Adjustable ball pressure
- ◆ Patented union screwing with handle
- ◆ Teflon seats.
- ◆ EPDM o-rings. PN16



- ◆ Slip or Threaded Connection
- ◆ 25 - 32 - 40 mm and New 50 - 63

Butterfly Valve

24

- ◆ Handle from ABS.
- ◆ UPVC Body, EPDM Lining, PN 10
- ◆ Stem **CK45** Galvanized Steel (**AISI 316** Optional)



- ◆ The valve can be positioned in desired angle by the help of handle clutches.
- ◆ 3,75 degrees angle sensitivity
- ◆ Security padlock hole.
- ◆ Sizes from **d75mm to d225 mm**
- ◆ **ISO5211** actuator connection axis

Check Valve

31

- ◆ Wide demper opening distance
- ◆ Easy top access for maintenance
- ◆ Transparent top lid for open view




- ◆ UPVC Body **Ø63 mm** socket connection
- ◆ Union adaptable for **Fitvalf d.63 Ball valve handle**

Automatic Ball

w/Actuator Valves

Ø50 - Ø63 mm with optional wifi control

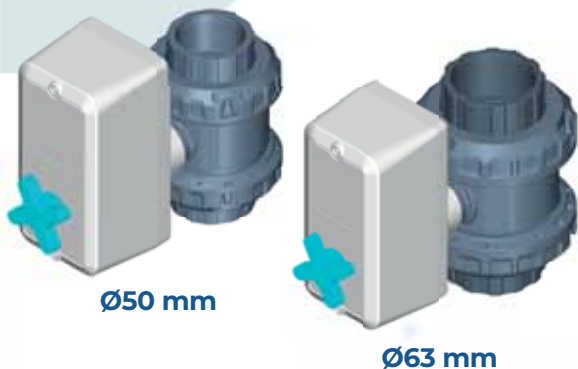

Fittings - Elbow

34

- ◆ Elbow, 90° Ø250
- ◆ PN 10



One Side Female

34

Thread 90 Dg

- ◆ Elbow 63 x 2"
- ◆ Elbow 50 x 1 1/2"



One Side Female

37

Threaded Te

- ◆ 50 x 1 1/2"
- ◆ 63 x 2"



Cross Te

38

◆ 110 mm



Flange Adaptor

40

◆ 250 mm



Our Brand-New Products 2024

Check out New Products



◆ 250 mm



Male Adaptor

49

- ◆ 63-50-1 1/2"
- ◆ 75-63-2"
- ◆ 40-32-1"
- ◆ 32-25-3/4"



Male Adaptor

49

Threaded Te

- ◆ MxM 50 x 1 1/2"
- ◆ MxM 63 x 2"



Female Adaptor

50

- ◆ 75-63-2"
- ◆ 63-50-1 1/2"
- ◆ 40-32-1"
- ◆ 32-25-3/4"



Flange Adaptor

58



- ◆ UPVC Solvent Cements
- ◆ Plastic bottle with brush