

133101 – 133119

Elbow *90°*

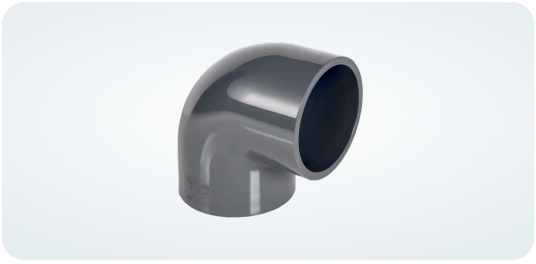

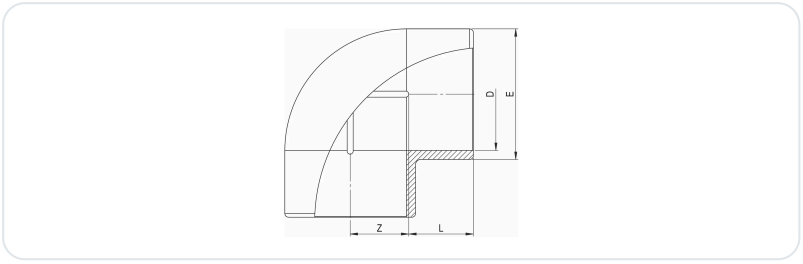

Nominal pressure	Pipe size	Standard
PN 16 / 10	d 20–400	EN 1452-3

FEATURES

- **Virgin UPVC** Precision injection moulded from high-density virgin UPVC compounds.
- **Reinforced stress zones** Increased wall thickness at the change of direction.
- **Low head loss** Smooth interior sweeps minimise flow separation and friction losses.
- **Precise socket taper** Socket taper to ISO 727 and EN ISO 1452 for maximum fusion when cementing.

TECHNICAL DATA

mm	Code	DN	E	D	L	Z	PN	Box
20	133101	16	25	20	16	11	16	250
25	133102	20	31	25	19	13	16	500
32	133103	25	39	32	22	17	16	250
40	133104	32	48	49	26	23	16	150
50	133105	40	58	50	31	20	16	180
63	133106	50	74	63	38	30	16	100
75	133107	65	87	75	44	38	16	70
90	133108	80	104	90	50	44	16	40
110	133109	100	124	110	60	57	16	20
125	133110	110	139	125	69	67	16	16
140	133111	125	155	140	76	71	16	12
160	133112	150	180	160	75	86	16	8
200	133113	175	222	200	106	106,5	10	4
225	133114	200	246	225	119	115,5	10	3
250	133115	250	279	250	131	128	10	2
280	133116	250	317	280	150	140	10	1
315	133117	300	352	315	164	161,5	10	1
355	133118	350	385	355	184	267	10	1
400	133119	400	431	400	203	367	10	1

Dimensions in mm. Box: pieces per box. Source: Fitvalf catalogue 2026–2027.

Star Water Technology
A GEMAŞ Group company
fitvalf.com.tr

Address
İTOB Organize Sanayi Bölgesi
10030 Sokak No:10
Menderes / İzmir, Türkiye

Contact
+90 232 449 19 27
info@fitvalf.com.tr