
131111LEA – 131119LEA

Electric Actuated Ball Valve *Solvent Cement*



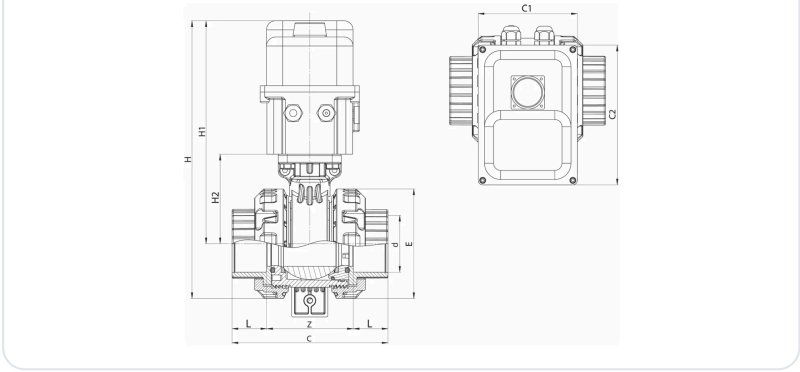

Nominal pressure	Pipe size	Actuator
PN 16	d 20–110	24V DC

FEATURES

- **Thermoplastic housing** Noncorrosive thermoplastic actuator body.
- **Position indicator** ON/OFF position indicator.
- **Thermal protection** Internal thermal protection.
- **0°–90° working angle** Quarter-turn ON/OFF operation.
- **Manual override** Manual control with a wrench.
- **IP67** IP67 protection class.

TECHNICAL DATA

d	DN	Code	C	C1	C2	E	H	H1	H2	L	Z	PN	Box
20	16	131111LEA	93	96	137	64,5	214	182	54	20	53	16	1
25	20	131112LEA	93	96	137	64,5	214	182	54	20	53	16	1
32	25	131113LEA	107	96	137	75	228	190	61	23,5	60	16	1
40	32	131114LEA	122	96	137	88	241	197	72	26	70	16	1
50	40	131115LEA	146	110	155	100	289	239	92	33	80	16	1
63	50	131116LEA	169	110	155	122	309	248	100	38	93	16	1
75	65	131117LEA	197	110	155	143	333	262	107	44	109	16	1
90	80	131118LEA	221	110	155	143	333	262	107	52	114	16	1
110	100	131119LEA	286	110	155	226	415	309	154	60	166	16	1

Dimensions in mm. C1, C2, H and H1 values may vary. Source: Fitvalf catalogue 2026–2027.

Star Water Technology
A GEMAŞ Group company
fitvalf.com.tr

Address
İTOB Organize Sanayi Bölgesi
10030 Sokak No:10
Menderes / İzmir, Türkiye

Contact
+90 232 449 19 27
info@fitvalf.com.tr