

1390600 – 1391619

UPVC Pipe *Solvent Socket*

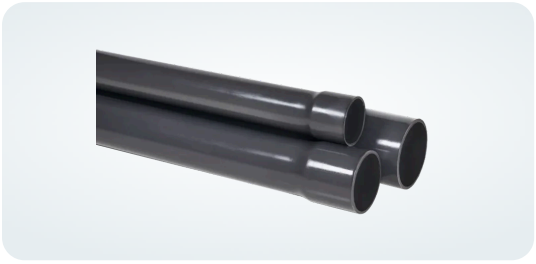



Nominal pressure	Pipe size	Length
PN 6 / 10 / 16	d 20–400	6 m

FEATURES

- **Three pressure classes** PN 6, PN 10 and PN 16, each with its own wall thickness S.
- **Solvent socket** Integrated socket (KT) for solvent cement joints.
- **6 m lengths** In PN 6, 50 and 63 mm pipes are delivered in 3 m or 6 m; please specify.
- **Weight per metre** kg/m given for every size and class for logistics planning.

TECHNICAL DATA

mm	Code PN 6	S	kg/m	Code PN 10	S	kg/m	Code PN 16	S	kg/m
20	–	–	–	1391001	1,5	0,174	1391601	1,5	0,137
25	–	–	–	–	–	–	1391602	1,9	0,215
32	–	–	–	1391002	1,6	0,244	1391603	2,4	0,345
40	1390600	1,5	0,292	1391003	1,9	0,358	1391604	3,0	0,535
50	1390601	1,6	0,369	1391004	2,4	0,552	1391605	3,7	0,821
63	1390602	2,0	0,574	1391005	3,0	0,864	1391606	4,7	1,303
75	1390603	2,3	0,784	1391006	3,6	1,126	1391607	5,6	1,834
90	1390604	2,8	1,151	1391007	4,3	1,766	1391608	6,7	2,639
110	1390605	2,7	1,427	1391008	4,2	2,175	1391609	6,6	3,291
125	1390606	3,1	1,856	1391009	4,8	2,808	1391610	7,4	4,208
140	1390607	3,5	2,343	1391010	5,4	3,546	1391611	8,3	5,287
160	1390608	4,0	3,055	1391011	6,2	4,653	1391612	9,5	6,909
200	1390609	4,9	4,676	1391012	7,7	7,200	1391613	11,9	10,809
225	1390610	5,5	5,913	1391013	8,6	9,070	1391614	13,4	13,747
250	1390611	6,2	7,414	1391014	9,6	11,270	1391615	14,8	16,899
280	1390612	6,9	9,242	1391015	10,7	14,190	1391616	16,6	21,256
315	1390613	7,7	11,627	1391016	12,1	17,641	1391617	18,7	26,997
355	1390614	8,7	14,831	1391017	13,6	22,477	1391618	21,1	34,456
400	1390615	9,8	18,994	1391018	15,3	28,500	1391619	23,7	43,867

S: wall thickness (mm). 6 m lengths. Source: Fitvalf catalogue 2026–2027.

Star Water Technology
A GEMAŞ Group company
fitvalf.com.tr

Address
İTOB Organize Sanayi Bölgesi
10030 Sokak No:10
Menderes / İzmir, Türkiye

Contact
+90 232 449 19 27
info@fitvalf.com.tr